

Specification

EW620 - Series

EW62T3914, EW62T3924. EW62T3934

EW62T3914 (4 Channels, Differential Current Input, 0~20mA / 4~20mA / -20~20mA, 12bits)

EW62T3924 (4 Channels, Differential Voltage Input, 0~10V / 0~5V / -10~10V / -5~5V, 12bits)

EW62T3934 (4 Channels, Differential Current Input, 0~20mA / 4~20mA / -20~20mA, 16bits)

EW62T3944 (4 Channels, Differential Voltage Input, 0~10V / 0~5V / -10~10V / -5~5V, 16bits)

Specification

History

REV.	PAGES	REMARKS	DATE	Editor
1.01		Add EW62T3934, EW62T3944	Jan. 09, 2019	A Porro

Specification

Table of Contents

Sommario

History	2
Table of Contents.....	3
1. Environment Specification	4
EW62T3914 -EW62T3934 (4 Channels, Differential Current Input, 0~20mA / 4~20mA / -20~20mA, 12/16bits).....	5
1.1. EW62T3914-EW62T3934 Specification.....	5
1.2. EW62T3914 – EW62T3934 Wiring Diagram.....	6
1.3. EW62T3914 – EW62T3934 LED Indicator.....	7
1.3.1. LED Indicator	7
1.3.2. Channel Status LED	7
1.4. Data Value / Current.....	7
EW62T3924 – EW62T3944 (4 Channels, Differential Voltage Input, 0~10V / 0~5V / -10~10V / -5~5V, 12/16bits)	11
1.5. EW62T3924 – EW62T3944 Specification	11
1.6. EW62T3924 – EW62T3944 Wiring Diagram.....	12
1.7. EW62T3924 – EW62T3944 LED Indicator.....	13
1.7.1. LED Indicator	13
1.7.2. Channel Status LED	13
1.8. Data Value / Voltage	13
1.9. Mapping Data into the Image Table	15
2. Input Range Setting & Conversion Time Setting	16
2.1. EW62T3914.....	16
2.2. EW62T3924.....	16

Specification

1. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 60
UL Temperature	-20°C ~ 60
Non-Operating Temperature	-40°C ~ 85
Relative Humidity	5% ~ 90% Non-condensing
Mounting	DIN rail
General Specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration - 5 ~ 25Hz : ±1.6mm - 25 ~ 300Hz : 4g - Sweep Rate : 1 Oct/min, 20 cycles Random Vibration - 10 ~ 40 Hz : 0.0125 g ² /Hz - 40 ~ 100 Hz : 0.0125 → 0.002 g ² /Hz - 100 ~ 500 Hz : 0.002 g ² /Hz - 500 ~ 2000 Hz : 0.002 → 1.3 x 10 ⁻⁴ g ² /Hz - Test time : 1hrs for each test
Industrial Emissions	EN61000-6-4/All : 2011
Industrial Immunity	EN 61000-6-2 : 2005
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL

Specification


2. EW62T3914 -EW62T3934 (4 Channels, Differential Current Input, 0~20mA / 4~20mA / -20~20mA, 12/16bits)

2.1. EW62T3914-EW62T3934 Specification

Items	Specification	
	EW62T3914	EW62T3934
Input Specification		
Inputs Per Module	4 Channels Differential, Non-isolated Between Channels	
Indicators	4 Green Input Status LEDs	
Resolution in Ranges	12 bits : 4.88uA/bit(0~20mA) 12 bits : 3.91uA/bit(4~20mA) 12 bits : 9.77uA/bit(-20~20mA)	16bit (Include Sign) 15 bits : 0.61uA/Bit(0~20mA) 15 bits : 0.49uA/Bit(4~20mA) 15bit(Include Sign) 15 bits : 1.22uA/Bit(-20~20mA)
Input Range	0~20mA, 4~20mA, -20~20mA	
Data Format	16bits Integer (2' compliment)	
Module Error	±0.1% Full Scale @ 25°C ±0.3% Full Scale @ -40°C, 60°C	
Input Impedance	121.5Ω	
Diagnostic	Field Power Off : LED Blinking Field Power On : LED Off < 0.5% (Maximum Input Value) Field Power On : LED On > 0.5% (Maximum Input Value) Minimum Range Over : LED Off < 3mA (4~20mA) Maximum Range Over : LED Off > 21mA(-20~20mA) Minimum Range Over : LED Off < -21mA (-20~20mA)	
Conversion Time	1msec / All channel	
Calibration	Not Required	
Common Type	1 Common, Field Power 0V is Common(AGND)	
General Specification		
Power Dissipation	Max. 30mA @ 5Vdc	
Isolation	I/O to Logic : Photocoupler Isolation Field power : DC/DC Converter Isolation	I/O to Logic : Isolation Field power : Non-Isolation
Field Power	Supply Voltage : 24Vdc nominal Voltage Range : 60°C : 18 ~ 26.4Vdc 50°C : 18 ~ 32Vdc Power Dissipation : Max. 40mA@24Vdc	
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)	
Weight	58g	
Module Size	12mm x 99mm x 70mm	
Environment Condition	Refer to 'Environment Specification'	

Specification

2.2. EW62T3914 – EW62T3934 Wiring Diagram

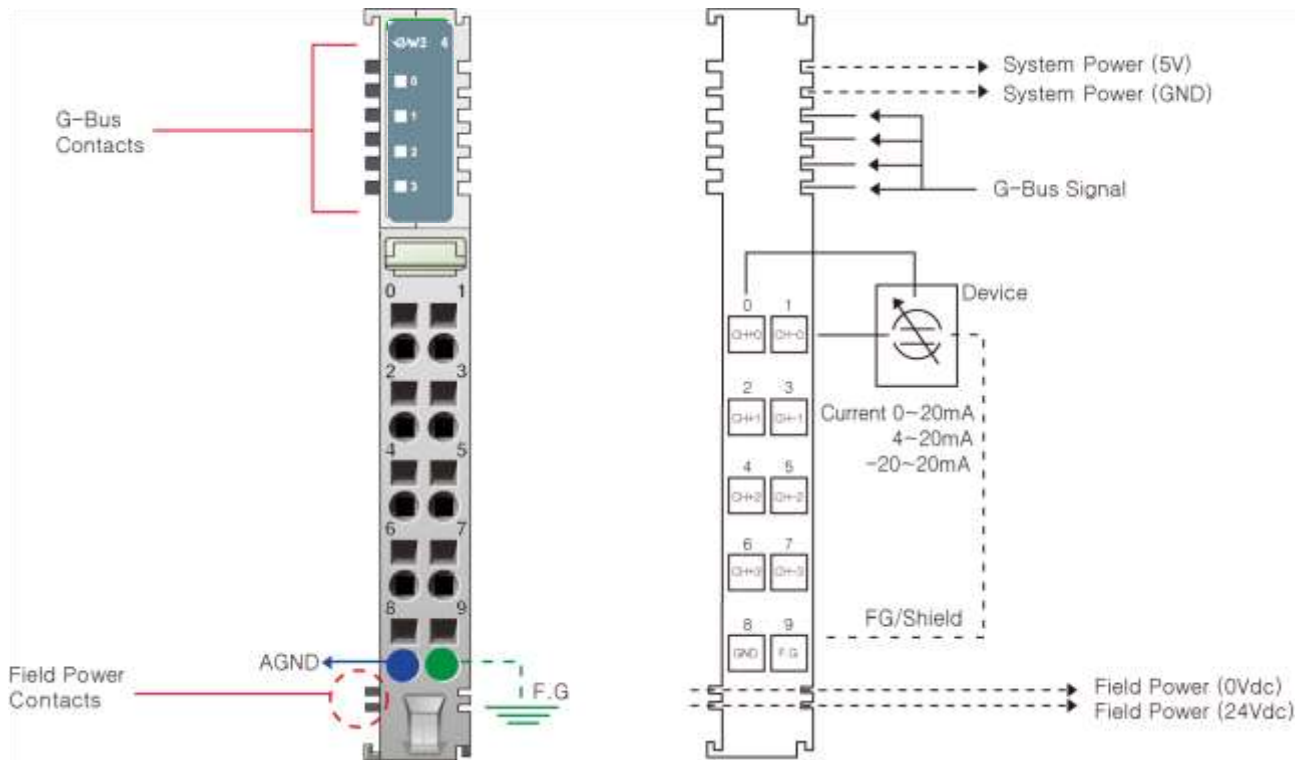

Pin No.	Signal Description	Signal Description	Pin No.
0	Input Channel 0(+)	Input Channel 0(-)	1
2	Input Channel 1(+)	Input Channel 1(-)	3
4	Input Channel 2(+)	Input Channel 2(-)	5
6	Input Channel 3(+)	Input Channel 3(-)	7
8	Input Channel Common(AGND)	Field Ground	9

Specification

2.3. EW62T3914 – EW62T3934 LED Indicator

2.3.1. LED Indicator



LED No.	LED Function / Description	LED Color
0	INPUT Channel 0	Green
1	INPUT Channel 1	Green
2	INPUT Channel 2	Green
3	INPUT Channel 3	Green

2.3.2. Channel Status LED


Status	LED	To indicate
Normal Operation	[LED Off < 0.5% (Maximum Input Value)] - Channel OFF [LED On > 0.5% (Maximum Input Value)] - Channel Green	Normal Operation
Normal Operation	0~20mA : LED Off > 21mA, LED Off < 0mA 4~20mA : LED Off > 21mA, LED Off < 3mA -20~20mA : LED Off > 21mA, LED Off < -21mA	Over range Check
Field Power Error	All Channel Repeat the Green and OFF	Field Power is unconnected

2.4. Data Value / Current

Current Range : 0~20mA


Current	0.0mA	5.0mA	10.0mA	20.0mA
Data(Hex)	H0000	H03FF	H07FF	H0FFF

Specification

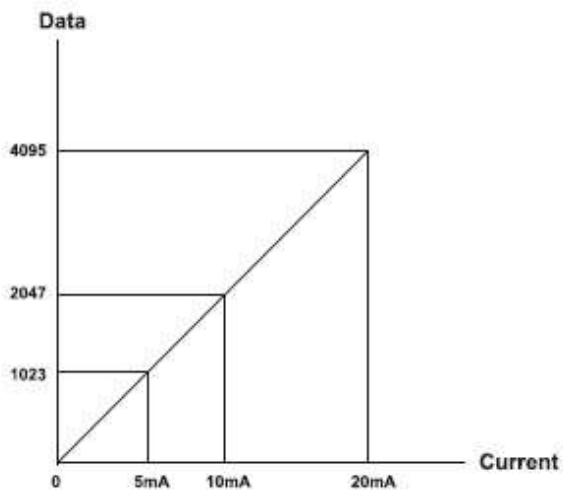


Current Range : 4~20mA

Current	4.0mA	8.0mA	12.0mA	20.0mA
Data(Hex)	H0000	H03FF	H07FF	H0FFF

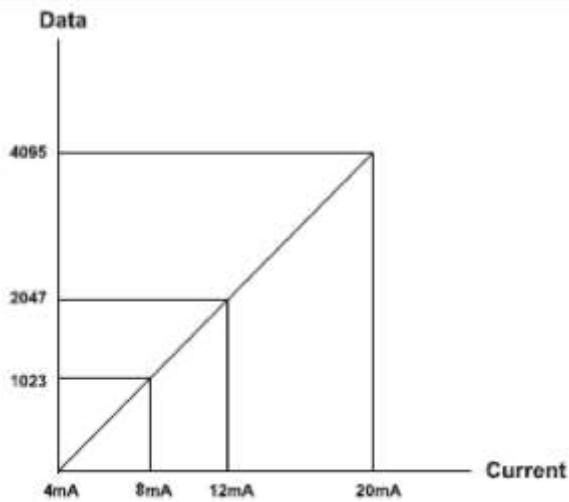

Specification


Current	-20.0mA	-10.0mA	0mA	+10.0mA	+20.mA
Data(Hex)	HF800	HFC00	H0000	H03FF	H07FF

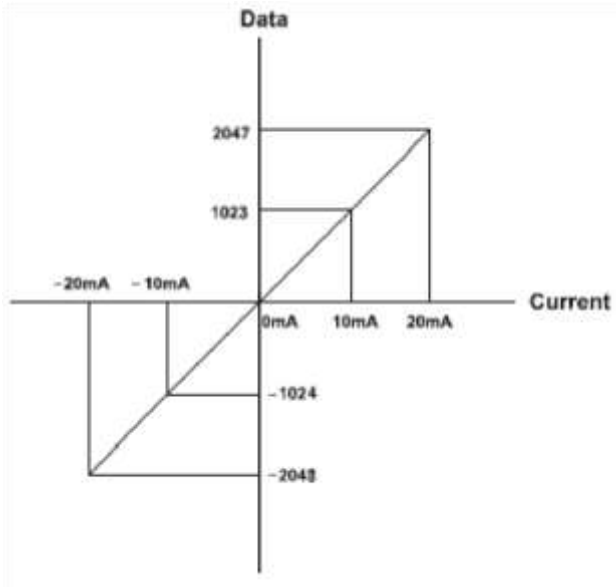

2.5. Mapping Data into the Image Table

• Input Module Data

Analog Input Ch0
Analog Input Ch1
Analog Input Ch2
Analog Input Ch3



Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0	Analog Input Ch0 Low byte							
Byte 1	Analog Input Ch0 High byte							
Byte 2	Analog Input Ch1 Low byte							

Specification

Byte 3	Analog Input Ch1 High byte
Byte 4	Analog Input Ch2 Low byte
Byte 5	Analog Input Ch2 High byte
Byte 6	Analog Input Ch3 Low byte
Byte 7	Analog Input Ch3 High byte

- **Input Image Value**

Specification


3. EW62T3924 – EW62T3944 (4 Channels, Differential Voltage Input, 0~10V / 0~5V / -10~10V / -5~5V, 12/16bits)

3.1. EW62T3924 – EW62T3944 Specification

Items	Specification	
	EW62T3924	EW62T3944
Input Specification		
Inputs Per Module	4 Channels Differential, Non-isolated Between Channels	
Indicators	4 Green Input Status LEDs	
Resolution in Ranges	12 bits : 2.44mV/Bit(0~10V) 12 bits : 1.22mV/Bit(0~5V) 12 bits : 4.88mV/Bit(-10~10V) 12 bits : 2.44mV/Bit(-5~5V)	16 bit (Include Sign) 15 bits : 0.31mV/Bit(0~10V) 15 bits : 0.15mV/Bit(0~5V) 15 bit (Include Sign) 15 bits : 0.61mV/Bit(-10~10V) 15 bits : 0.31mV/Bit(-5~5V)
Input Range	0~10Vdc, 0~5Vdc, -10~10Vdc, -5~5Vdc	
Data Format	16bits Integer (2' compliment)	
Module Error	±0.1% Full Scale @ 25°C ±0.3% Full Scale @ -40°C, 60°C	
Input Impedance	667kΩ	
Diagnostic	Diagnostic Field Power Off : LED Blinking Field Power On : LED Off < 0.5% (Maximum Input Value) Field Power On : LED On > 0.5% (Maximum Input Value)	
Conversion Time	1msec / All channel (≤ 0.25ms per channel)	
Calibration	Not Required	
Common Type	1 Common, Field Power 0V is Common(AGND)	
General Specification		
Power Dissipation	Max. 30mA @ 5Vdc	
Isolation	I/O to Logic : Photocoupler Isolation Field power : Non-Isolation	I/O to Logic : Isolation Field power : Non-Isolation
Field Power	Supply Voltage : 24Vdc nominal Voltage Range : 18 ~ 32Vdc Power Dissipation : Max. 45mA@24Vdc	
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)	
Weight	58g	
Module Size	12mm x 99mm x 70mm	
Environment Condition	Refer to 'Environment Specification'	

Specification

3.2. EW62T3924 – EW62T3944 Wiring Diagram

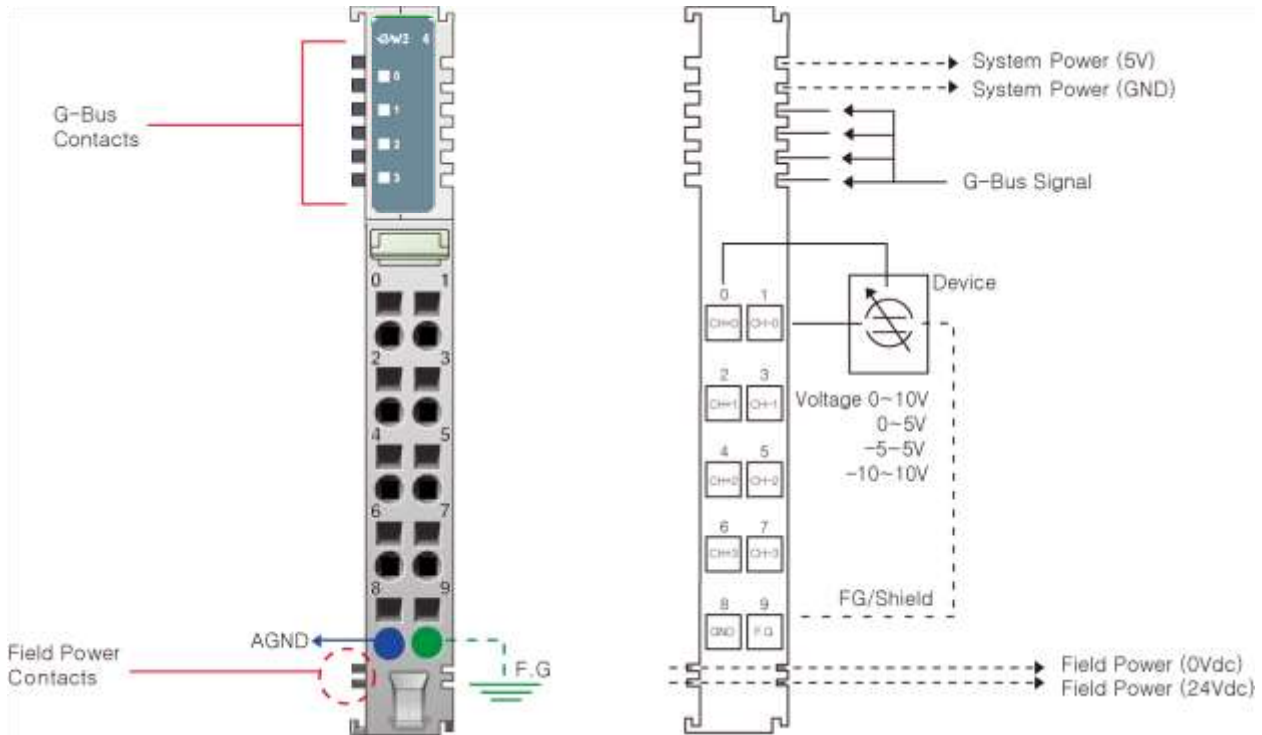

Pin No.	Signal Description	Signal Description	Pin No.
0	Input Channel 0(+)	Input Channel 0(-)	1
2	Input Channel 1(+)	Input Channel 1(-)	3
4	Input Channel 2(+)	Input Channel 2(-)	5
6	Input Channel 3(+)	Input Channel 3(-)	7
8	Input Channel Common(AGND)	Field Ground	9

Specification

3.3. EW62T3924 – EW62T3944 LED Indicator

3.3.1. LED Indicator



LED No.	LED Function / Description	LED Color
0	INPUT Channel 0	Green
1	INPUT Channel 1	Green
2	INPUT Channel 2	Green
3	INPUT Channel 3	Green

3.3.2. Channel Status LED


Status	LED	To indicate
Normal Operation	[LED Off < 0.5% (Maximum Input Value)] - Channel OFF [LED On > 0.5% (Maximum Input Value)] - Channel Green	Normal Operation
Field Power Error	All Channel Repeat the Green and OFF	Field Power is unconnected

3.4. Data Value / Voltage

Voltage Range : 0~10V


Voltage	0V	2.5V	5.0V	10.0V
Data(Hex)	H0000	H03FF	H07FF	H0FFF

Specification

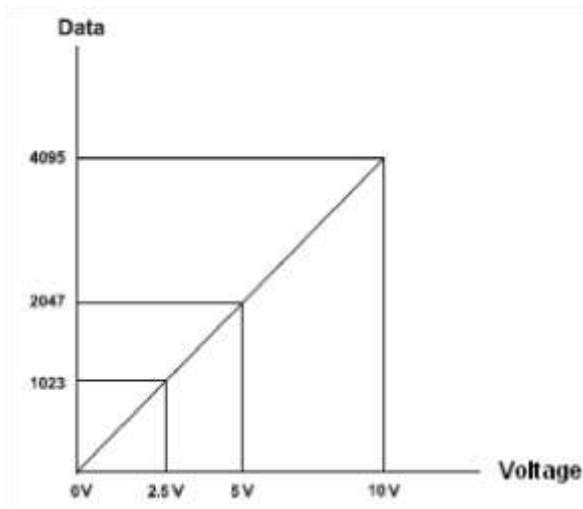

Voltage Range : 0~5V


Current	0V	1.25V	2.5V	5.0V
Data(Hex)	H0000	H03FF	H07FF	H0FFF

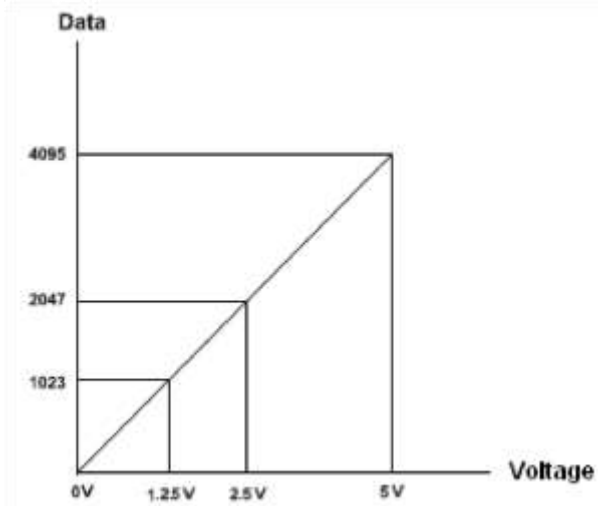

Voltage Range : -10~10V

Current	-10V	-5V	0V	5.0V	10.0V
Data(Hex)	HF800	HFC00	H0000	H03FF	H07FF


Specification

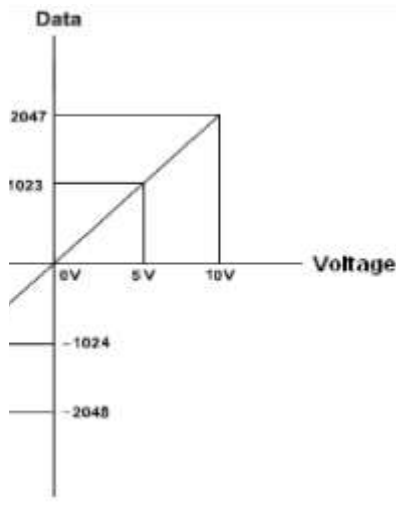

Voltage

Range : -5~5V

Current	-5V	-2.5V	0V	2.5V	5.0V
Data(Hex)	HF800	HFC00	H0000	H03FF	H07FF

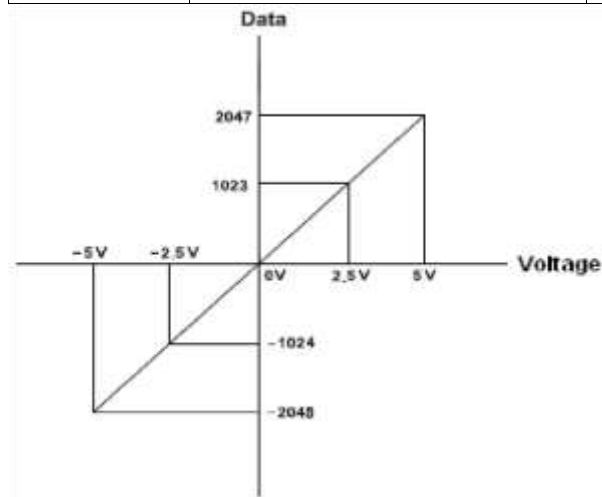


3.5. Mapping Data into the Image Table

- Input Module Data

Analog Input Ch0
Analog Input Ch1
Analog Input Ch2
Analog Input Ch3

Specification



- **Input Image Value**

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0	Analog Input Ch0 Low byte							
Byte 1	Analog Input Ch0 High byte							
Byte 2	Analog Input Ch1 Low byte							
Byte 3	Analog Input Ch1 High byte							
Byte 4	Analog Input Ch2 Low byte							
Byte 5	Analog Input Ch2 High byte							
Byte 6	Analog Input Ch3 Low byte							
Byte 7	Analog Input Ch3 High byte							

4. Input Range Setting & Conversion Time Setting

4.1. EW62T3914

Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	Ch#0 Command(H00 : 0~20mA, H01 : 4~20mA, H02 : -20~20mA)							
1	Ch#1 Command(H00 : 0~20mA, H01 : 4~20mA, H02 : -20~20mA)							
2	Ch#2 Command(H00 : 0~20mA, H01 : 4~20mA, H02 : -20~20mA)							
3	Ch#3 Command(H00 : 0~20mA, H01 : 4~20mA, H02 : -20~20mA)							
4	Filter Time(H00 : Default Filter(=20), H01 : Fastest ~ H62 : Slowest)							
5	Reserve							

* ID_PARAMETER (6Byte)

4.2. EW62T3924

Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	Ch#0 Command(H00 : 0~10V, H01 : 0~5V, H02 : -10~10V, H03 : -5~5V)							
1	Ch#1 Command(H00 : 0~10V, H01 : 0~5V, H02 : -10~10V, H03 : -5~5V)							

Specification

2	Ch#2 Command(H00 : 0~10V, H01 : 0~5V, H02 : -10~10V, H03 : -5~5V)
3	Ch#3 Command(H00 : 0~10V, H01 : 0~5V, H02 : -10~10V, H03 : -5~5V)
4	Filter Time(H00 : Default Filter(=20), H01 : Fastest ~ H62 : Slowest)
5	Reserve

* ID_PARAMETER (6Byte)